


## KLT30Y OFF-ROAD



WORKABLE FOR BOTH SINGLE-FACED & DOUBLE-FACED PALLET

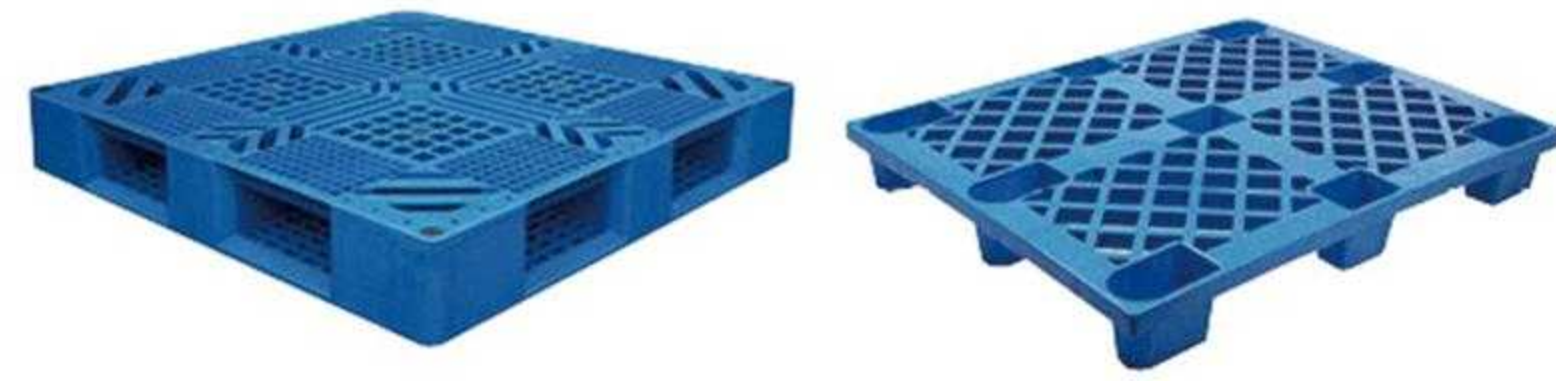

### BRIEF INTRODUCTION OF PRODUCT

- ◎ ADOPTING THE NEW 48V SYSTEM, IT HAS ADVANCED PERFORMANCE, COMFORTABLE OPERATION, SAFETY AND RELIABILITY, AND LOW COST OF USE.
- ◎ THE SOLID RUBBER WHEEL WITH A DIAMETER OF 300\*90 HAS STRONG CLIMBING AND OFF-ROAD ABILITY. IT CAN CLIMB AN 8% SLOPE WITH A FULL LOAD OF 3 TONS, EASILY COPE WITH DAILY CARGO HANDLING, MOUNTAIN CLIMBING, AND CAN ADAPT TO MORE SEVERE WORKING CONDITIONS. THE WHOLE VEHICLE ADOPTS A WATERPROOF DESIGN AND IS THE PREFERRED TOOL FOR MATERIAL HANDLING IN HARSH ON-SITE ENVIRONMENTS SUCH AS CONSTRUCTION SITES AND MOUNTAIN ROADS.
- ◎ THE STANDARD TURTLE SPEED TRAVEL SWITCH IS EASY TO OPERATE, AND THE REVERSE BEARING SUPPORT IS ADOPTED, MAKING THE STEERING EASIER AND MORE FLEXIBLE.
- ◎ IT USES AN INTEGRATED PATENTED OIL CYLINDER, ADOPTS A POLYVINYL RING GUIDE, CANCELS THE TRADITIONAL SWITCH EYE POSITION, AND ADOPTS OIL RETURN POSITIONING TO REDUCE THE FAILURE RATE AND AVOID COMMON PROBLEMS SUCH AS BITING THE CYLINDER AND PUNCHING THE CYLINDER.
- ◎ THE STAMPED REINFORCED FORK AND THE THICKER BODY SHEET METAL HAVE HIGHER STRENGTH AND IMPACT RESISTANCE. THE MINIMUM HEIGHT OF THE CARGO IS 80MM, WHICH IS SUITABLE FOR PALLET HANDLING OF VARIOUS SPECIFICATIONS.


## KLT30Y OFF-ROAD

		KLT30Y
Driving mode (驱动方式)		电动 Electric
Operation form (操作形式)		步行式 Walking style
Load capacity (额定载荷)	kg	3000
Load center distance (载荷中心距)	mm	600
Service weight(with battery) (整机重量)	kg	32Ah:215/65Ah: 235
Tire size-front wheel (前轮尺寸)	mm	300x90
Tire size-driving wheel (后轮尺寸)	mm	双轮80*70 double wheel
Lifting (额定起升高度)	mm	115
Lowered height (货叉最低高度)	mm	80±2
Overall length (整车长度)	mm	1740
Overall width (整车宽度)	mm	685/575
Fork outer width (货叉外宽)	mm	685/550
Travel speed (最大行驶速度)	km/h	满载4.0空载4.5 laden4.0/unladen4.5
Gradeability (爬坡度)	%	满载8空载16 laden8 unladen16
Battery voltage/capacity (电池电压/容量)	V/ Ah	48/32 or 48/65
Drive motor power (驱动电机功率)	W	1200

## Hand pallet truck



Suitable for single-sided/double-sided pallets

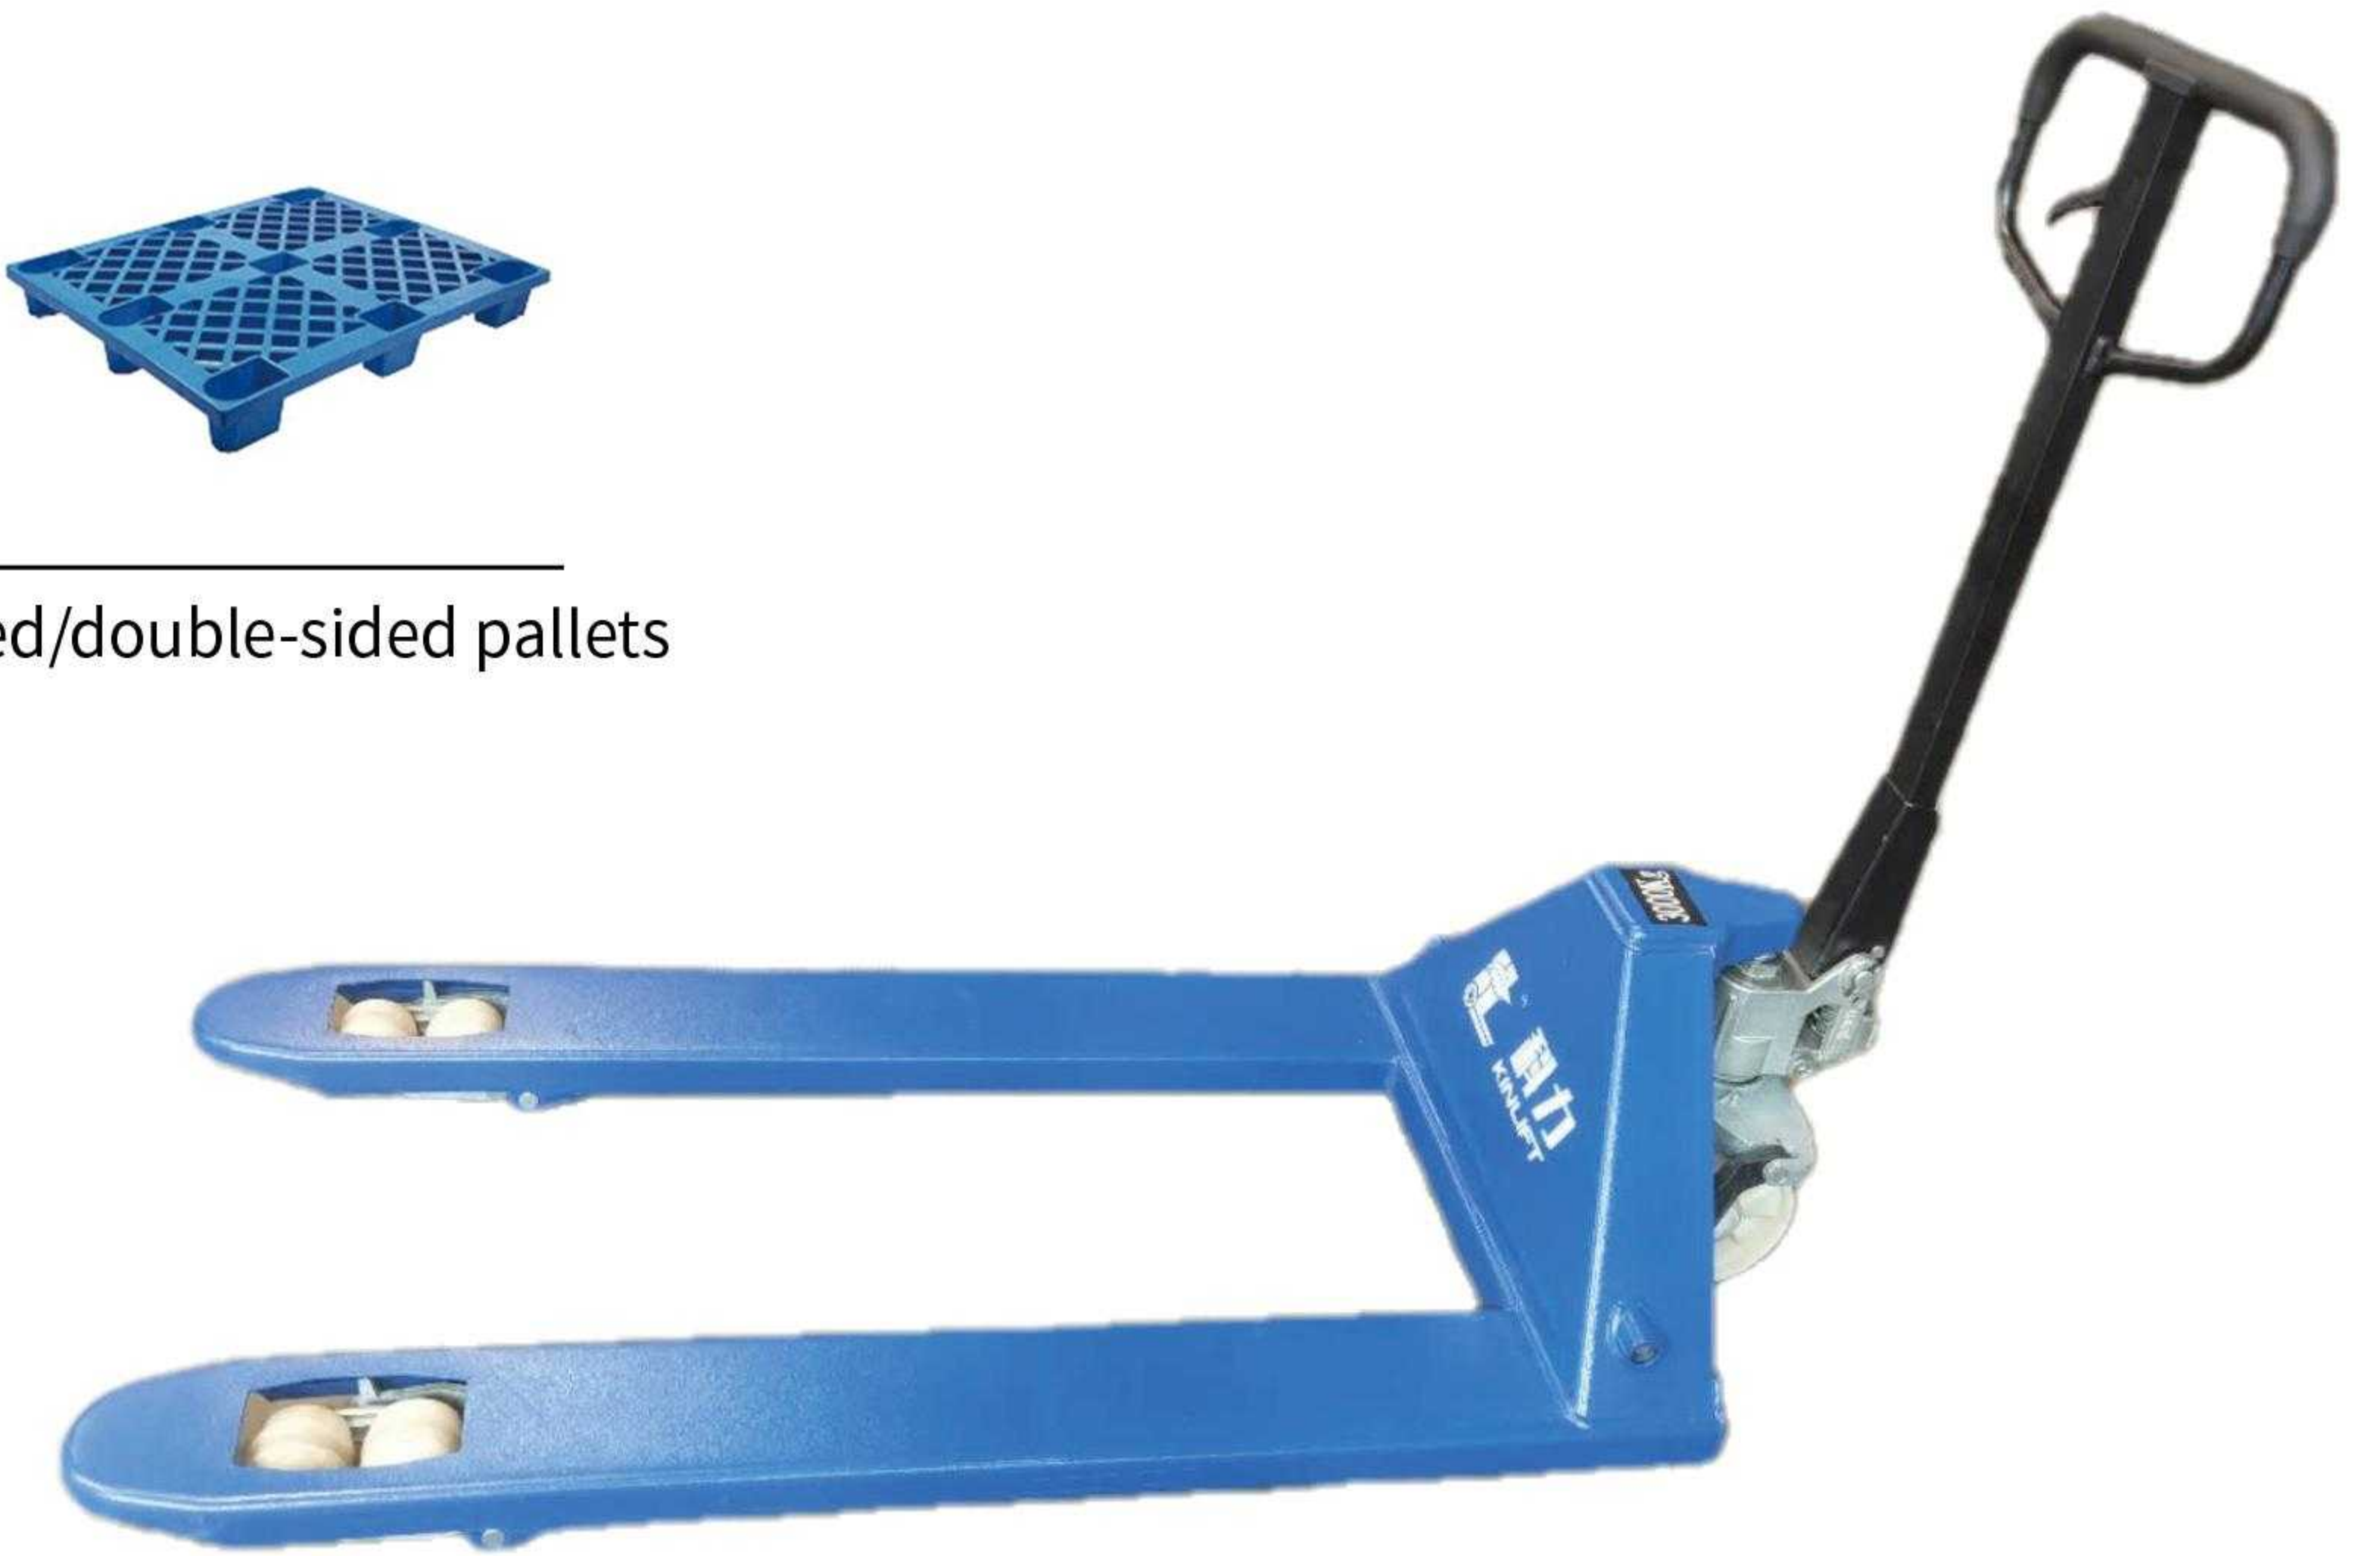

### BRIEF INTRODUCTION OF PRODUCT

- ◎ Ideal for manual cargo handling in supermarkets, warehouses and factories.
- ◎ Compact design, beautiful appearance, maximum load 2000/2500/3000kg.
- ◎ High-performance integrated pouring pump.
- ◎ Comfortable rubber-coated handle Comfortable and non-slip, ergonomic handle, increase comfort and reduce hand fatigue.
- ◎ Wear-resistant nylon wheel, low pulling resistance, easy to pull, corrosion-resistant, suitable for cement floors and some complex floors.

### OPTIONAL CONFIGURATION



PU wheel

### KLT-M Product Parameters

		Model (型号)	KLT20M	KLT25M	KLT30M
Performance (性能)	Maximum load capacity (负载能力)	kg	2000	2500	3000
	Minimum Fork height (货叉最低高度)	mm	85	85	85
	Maximum Fork height (货叉最高高度)	mm	205	205	205
	Fork outside width (货叉外侧宽度)	mm	550/680	550/680	550/680
Tire (轮胎)	Fork length (货叉长度)	mm	1150/1220	1150/1220	1150/1220
	Tire (轮胎)	mm	80*80	80*80	80*80
	Steering wheel (方向轮)	mm	180*50	180*50	180*50

polyurethane (聚氨酯)