


## KLJC0806HDA.KLJC1008HDA



Suitable for single-sided/double-sided pallets

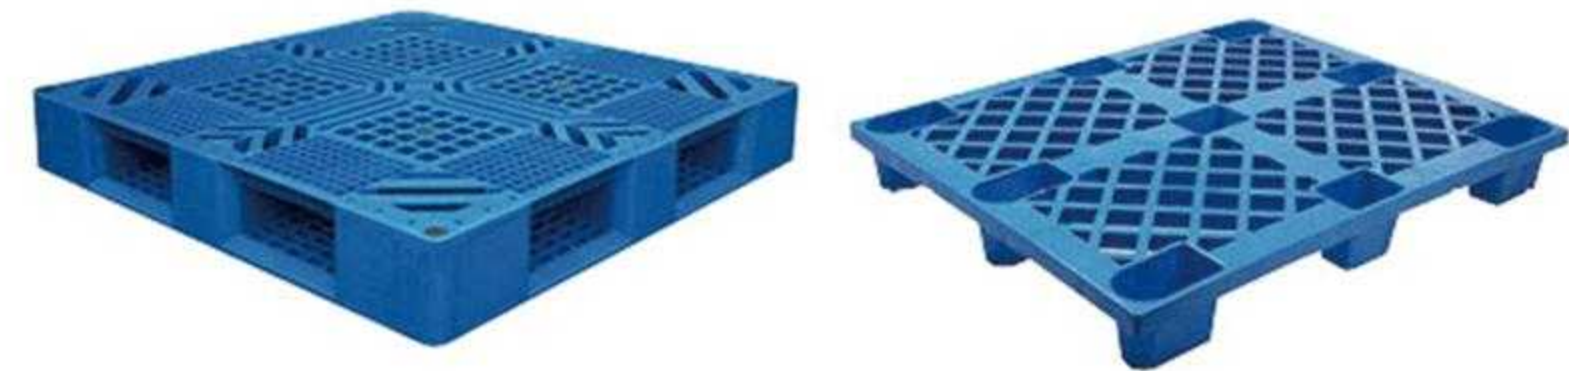

### BRIEF INTRODUCTION OF PRODUCT

- ⊙ 113 kg safe working load (2 people)
- ⊙ Non-marking solid tires
- ⊙ Proportional control
- ⊙ Multi-disc brakes
- ⊙ Double flashing working process warning
- ⊙ Dual front wheel drive 0 turning radius
- ⊙ 25% climbing ability
- ⊙ 24V DC power battery, longer battery life
- ⊙ Automatic charging function
- ⊙ Ground and platform power display
- ⊙ Maintenance-free battery
- ⊙ Foldable guardrails for easy transportation and storage
- ⊙ Suitable for indoor decoration, installation, and maintenance work scenes
- ⊙ Equipped with manual emergency descent function
- ⊙ Ground and platform equipped with emergency switches
- ⊙ Control system fault code display
- ⊙ Platform door automatically closes
- ⊙ Automatic deployment of anti-pothole protection system
- ⊙ Tilt sensor monitors working status in real time
- ⊙ Complies with ANSI and OSHA. CE marked, complies with applicable European regulations, including the Machinery Directive using the EN280 design standard
- ⊙ Full fail-safe hydraulic system
- ⊙ Parking automatic brake

### STANDARD CONFIGURATION

- ⊙ Battery: Deep cycle power battery
- ⊙ Power supply: 110V or 230V
- ⊙ Control: Engineering grade platform driving handle
- ⊙ Structure: Scissor arm is made of low carbon alloy steel
- ⊙ Platform: Steel checkered plate non-slip tabletop
- ⊙ Painting: After multiple pre-treatment processes, the surface is durable

### OPTIONAL CONFIGURATION

- ⊙ Platform work light
- ⊙ Narrow basket for ceiling grid access
- ⊙ Pipe carrying kit
- ⊙ Tool box
- ⊙ Foam cushioning kit
- ⊙ Ground to platform AC power supply
- ⊙ Overload limit

## KLJC0806HDA.KLJC1008HDA Product Parameters

Model (型号)		KLJC1008HDA	KLJC0806HDA	
Dimensions (尺寸)	Maximum safe working height(最大安全工作高度)	10.0 m	8.0 m	
	Maximum platform height(最大平台高度)	A	8.0 m	
	Machine length (including step ladder)(整机长度(含脚踏梯))	C	2.49 m	
	Overall length (without step ladder)(整机长度(无脚踏梯))		2.30 m	
	Machine width(整机宽度)	B	0.81 m	
	Overall height (guardrails extended)(整机高度(护栏展开))	H	2.36 m	2.30 m
	Overall height (guardrails folded)(整机高度(护栏折叠))		2.00 m	1.86 m
	Platform width(平台宽度)	F	0.81 m	
	Platform length(平台长度)	E	2.27 m	
	Platform extension length(平台延伸长度)		0.90 m	
	Ground clearance (not lifted)(离地间隙(未起升状态))		0.10 m	
	Ground clearance (lifted state)(离地间隙(起升状态))		0.02 m	
	Wheelbase(轴距)	D	1.87 m	
	Tire(轮胎)		Ø 381 x 127 mm	
Performance (性能)	Security workloads(安全工作负载)	230 kg	380 kg	
	Extended platform load(延伸平台负载)		113 kg	
	Maximum number of passengers(最大乘员数)		2	
	Maximum allowable manual force(最大允许手动力)		400 N	
	Gradeability(爬坡能力)		25%	
	Maximum allowable machine tilt(最大允许整机倾斜)		1.5° / 3°	
	Machine weight(整机重量)	2050 kg	1930 kg	
	Rise time(上升时间)	28-33 sec	30-36 sec	
	Fall time(下降时间)	25-30 sec		
	Maximum travel speed (lowered/raised)(最大行驶速度(降低/起升))		3.5 / 0.8 km/h	
Electrical and hydraulic (电气和液压)	Voltage(电压)	24V DC		
	Drive wheel motor(驱动轮电机)	24V/ 3.5 kW	24V/ 3.5 kW	
	Batteries (deep cycle/sealed gel)(蓄电池(深循环/密封凝胶))	4 x 6V/ 180 Ah	4 x 6V/ 180 Ah	
	Charger(充电器)	24V/30A		
	Maximum hydraulic system pressure(最大液压系统压力)	225 bar		
	Work Pressure(工作压力)	170 bar		
	Hydraulic oil tank(液压油箱)	15 L	15 L	
Hydraulic oil tank(液压油箱)	5 L	5 L		

